


## Häfele Slido F-Flush52 20A



> Exclusive: For flush, inset doors



- > Door height:  $\leq 1,600$  mm
- > Door width: 450 to 900 mm
- > Door thickness: 18–22 mm (including handle: 45 mm)
- > Door offset: 70 mm
- > Installation depth: 70 mm
- > Material thickness: Min. 18 mm
- > Running gear: Bottom running
- > Adjustment facility:  $\pm 2$  mm via knurled screw without tools
- > Suitable for: 2 symmetrical door leaves
- > Application: Without handle, with recessed grip profiles or flush pull handles
- > Installation: Running and guide tracks for groove mounting, running gears for groove mounting and screw fixing

**Note**

A centre panel is mandatory.

Flush Sliding Doors

→ **Set**


	Supplied with	Internal cabinet width mm	For door width mm	Black anodized	Silver coloured anodized
For 2 doors	2 running tracks 4 running gears, bottom 4 guide parts, top Spacer plates For door thickness 18 and 20 mm	908	450	407.40.097	407.40.093
		1208	600	407.40.096	407.40.092
		1508	750	407.40.095	407.40.091
		1808	900	407.40.094	407.40.090

Packing: 1 set


**Order reference**

Please order handle profiles for high-quality appearance and easy processing separately (optional).

**Running distance of door**




Starting point

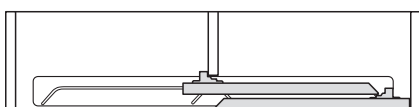


End position

**Handle profile application**

Infront, flush

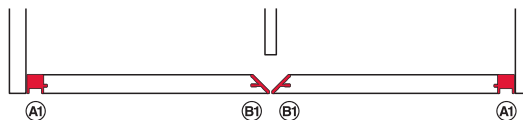

A1 Handle profile for Infront and flush doors  
B1 Cover profile for Infront and flush doors  
For door thickness 21 mm

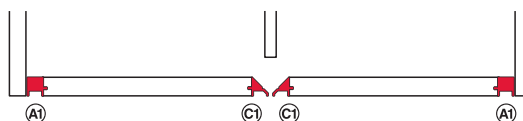

A1 Handle profile for Infront and flush doors  
C1 Handle profile for Infront and flush doors  
For door thickness 21 mm

DGH-M 2021, HDE-en, 11/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

