


## Pivot sliding door runner

For slide-in flaps




4

Pivot Sliding Door Runner

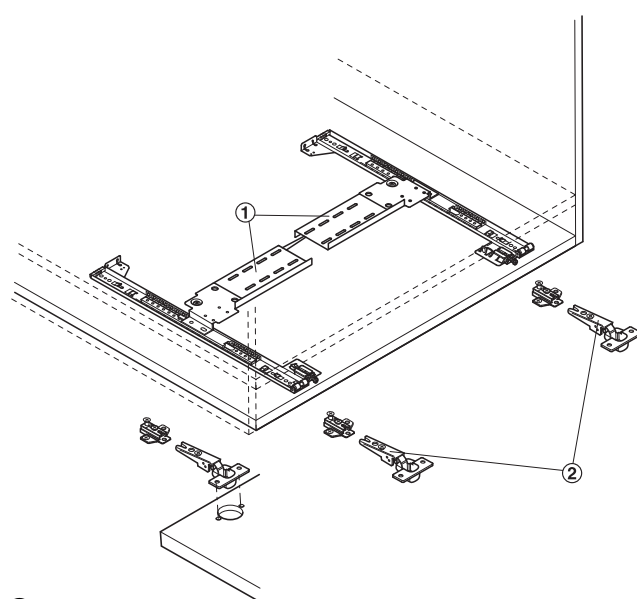

- ① Hinge carrier strip set
- ② Flap fixing set

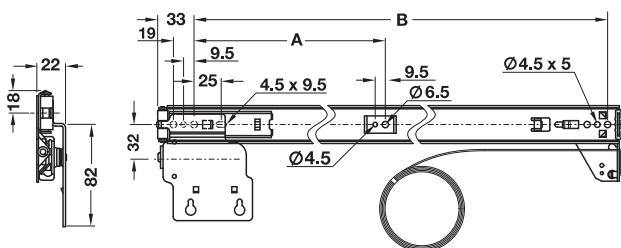

\* For installation lengths 303/354/405 mm

- ① Installation length
- ② Extension length

Installation length = min. cabinet depth that is required for installing the fitting

Extension length = max. flap height that can be moved into the cabinet

- > For swivelling up and sliding in flaps, e.g. in media furniture
- > No obstruction caused by open flap or open hinged door
- > Excellent running properties provided by synchronised runners



- > Material: Steel
- > Finish: Black galvanized
- > Dim.: Flap width: 915–2,000 mm, flap height: 255–660 mm, flap thickness: 19–32 mm
- > Hinge carrier strip set can be shortened for use with narrower flaps
- > With pull cable system for synchronous movement of left and right runner
- > Can also be installed vertically (for hinged doors)

### Note

The flap must not be subjected to loads in the open, not pushed-in position. It must be continuously guided and pushed-in by hand during the entire opening procedure.

### Supplied with

1 pair of runners with pull cable

Fixing material

Installation instructions

Installation length mm	Extension length AL mm	Dim. A mm	Dim. B mm	Cat. No.
303	210	–	257	408.24.530
354	261	–	307	408.24.535
405	312	–	358	408.24.541
456	343	178	409	408.24.546
506	394	203	460	408.24.551
557	445	229	511	408.24.556
608	496	254	561	408.24.561
659	546	279	612	408.24.566
710	597	305	663	408.24.571

Packing: 1 pair

### Order reference

Hinge carrier strip set and flap fixing set are not supplied.

Please order separately.

### → Hinge carrier strip set

- > Material: Steel
- > Colour: Black

### Supplied with

2 hinge carrier strips

3 connecting clips

Fixing material

	Cat. No.
Hinge carrier strip set	408.24.090

Packing: 1 or 3 sets


### Order reference

Number of required hinge carrier strip sets:

Flap width mm	For 1 flap	For 2 flaps
915–1422	1 set	2 sets
1423–2000	2 sets	3 sets

## → Flap fixing set

For inset mounting

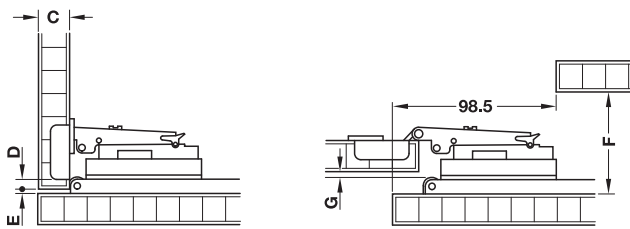

Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. G mm
19	8	2.3	51	1.4
19	9	1.8	51	0.3
19	15	2.3	60	14.4
21	15	2.3	60	12.8
22	15	2.3	60	11.2
24	15	2.3	60	9.6
25	15	2.3	60	8.0
27	15	2.3	60	6.4
29	15	2.3	60	4.8
30	15	2.3	60	3.2
32	15	2.3	60	1.6

### Supplied with

2 concealed hinges  
2 mounting plates  
2 spacers  
Fixing material

Door thickness mm	Version	Cat. No.
19–20	Cup drilling Ø 35 mm	408.24.092
22–32	Cup drilling Ø 40 mm	408.24.094

Packing: 1 set


### Order reference

Number of required flap fixing sets per flap:

Flap width mm	Required number of hinges	Required number of sets
915–1193	3	2
1194–1498	4	2
1499–1803	5	3
1804–2000	6	3

## → Flap fixing set

For overlay mounting

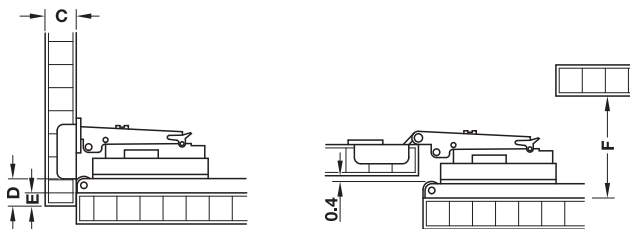

Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm
19	15	11.7	60

### Supplied with

2 concealed hinges  
2 mounting plates  
2 spacers  
Fixing material

Door thickness mm	Version	Cat. No.
19	Cup drilling Ø 40 mm	408.24.093

Packing: 1 set

### Order reference

Number of required flap fixing sets per flap:

Flap width mm	Required number of hinges	Required number of sets
915–1193	3	2
1194–1498	4	2
1499–1803	5	3
1804–2000	6	3