



### Concealed hinge for rebated doors

With exposed knuckle, gap 6 mm



- > Opening angle: 180°
- > Material: Zinc alloy
- > Cup fixing: For screw fixing
- > Hinge arm fixing: Slide-on system
- > Side panel thickness: 19 mm
- > For door thickness: 16–22 mm
- > Knuckle Ø: 7 mm
- > Knuckle length: 43 mm without decorative finials, 75 mm with decorative finials
- > Adjustment facility: 3-dimensional
- > With spring



4


Special Hinges



#### Note


Trial mounting is recommended.

- > The door's width must not exceed its height.
- > The distance between the hinges of doors with 2 hinges must be as long as possible (dim. X max. 100 mm).




With mounting plate distance 0 mm


#### Drilling pattern for cup fixing




#### Rebate dimensions



#### Installation dimensions



#### Number of hinges per door

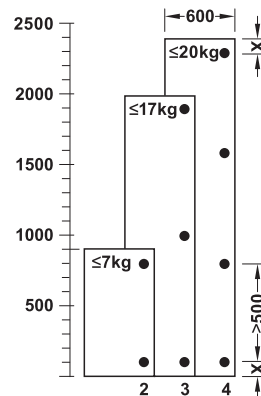

### → Full overlay mounting/half overlay mounting





Finish	Packing pieces	Cat. No.
Nickel plated	1	343.30.710
Burnished	1 or 50	343.30.106

### → Mounting plate



#### Drilling pattern

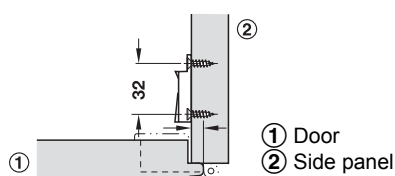

Overlay 5 mm with mounting plate 0 mm

- > Material: Zinc alloy
- > Finish: Nickel plated
- > Height adjustment: With screw ±2 mm
- > Installation: For screw fixing

Suitable for	Distance mm	Cat. No.
Full overlay mounting	0	323.71.707
Half overlay mounting	4	323.71.743

Packing: 1 or 50 pieces

DGH-M-INT 2020, HDE-en, 05/19; Dimensional data not binding. We reserve the right to alter specifications without notice.