




Worktop lift

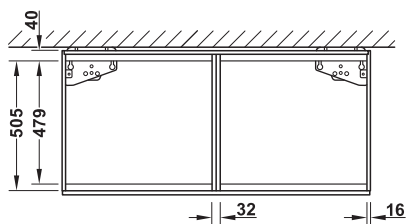

7

Lift Systems

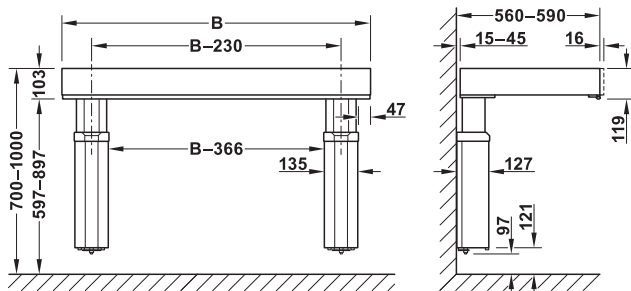

- > **Functionality:** For vertical movement of worktops, sinks, hobs, etc., drawers can be integrated, control with push-button switch, an automatic safety stop strip stops the downward movement by a gentle push
- > **Material:** Aluminium
- > **Dim.:** Travel: 700–1,000 mm, lift 300 mm, lift width: 600–2,400 mm (can be extended up to a total width of 4,800 mm using plus module), Frame height: 120 mm
- > **Load bearing capacity:** 100 kg
- > **Cabinet depth:** 560–580 mm from wall
- > **Travel speed:** 30 mm/s
- > **Mains voltage:** 230 V, 50 Hz
- > **Current input:** ≤5 A
- > **Version:** Intermediate struts can be freely positioned, Plug and play start-up
- > **Installation:** For screw fixing to the wall

Supplied with

- 1 lift system
- 1 built-in push-button switch
- 1 set of installation instructions
- 1 fitting for cover panels
- 1 safety stop strip on front edge
- Fittings for fixing front panels and worktops

Installation width mm	Dim. B mm	Cat. No.
600	590	506.00.106
700	690	506.00.107
800	790	506.00.108
1000	990	506.00.110
1200	1190	506.00.112
1400	1390	506.00.114
1600	1590	506.00.116
1800	1790	506.00.118
2000	1990	506.00.120
2200	2190	506.00.122
2400	2390	506.00.124


Packing: 1 piece

Note

Installation width = dim. B (worktop lift width) + 5 mm on each side

Order reference

Available on request:

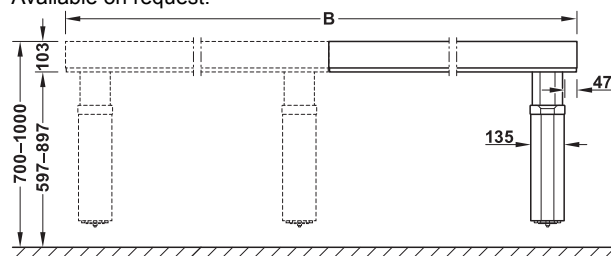

- > In addition to the worktop lift, plus modules are available for extending the total width. The plus modules must be connected to a worktop lift. Plus modules are up to 2,400 mm wide and extend the total width to max. 4,800 mm.
- > Worktop lift with floor standing motor, flat frame, as corner solution or special configuration
- > Other accessories such as drawers and slimline sinks

DGH-M 2021, HDE-en, 11/20; Dimensional data not binding. We reserve the right to alter specifications without notice.