


Linear runner 29/37 mm

Load bearing capacity up to 120 kg



- > Area of application: For sliding objects horizontally (cabinets, claddings, ...)
- > Installation: For screw fixing

Installation

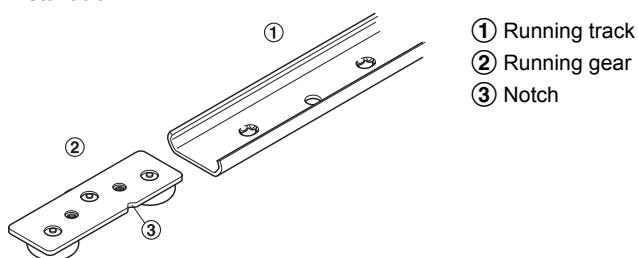

The running gears can be inserted into the running track on site. Notch ③ must point downwards with horizontal installation.

Load bearing capacity

The table refers to weights that are evenly distributed over the running gears. It is not recommended for use with applications where high torques are applied to running track and running gears.

Linear runners 29 mm


Installation type	Running gear	
	3 rollers	5 rollers
Bottom mounting 	15 kg	35 kg
Wall/side panel mounting 	42.5 kg	65 kg

Linear runners 37 mm


Installation type	Running gear	
	3 rollers	5 rollers
Bottom mounting 	20 kg	40 kg
Wall/side panel mounting 	80 kg	115 kg

The specified values apply to performed test distance of 100,000 m.

Application

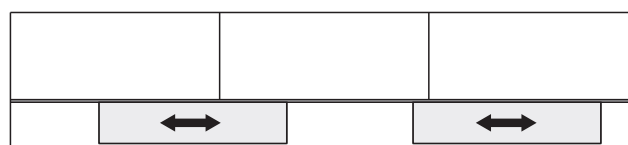


Wall unit

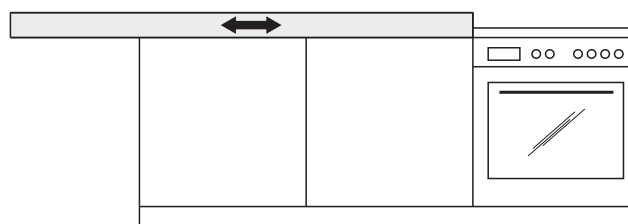

Moveable worktop

→ Running track for linear runner 29 mm

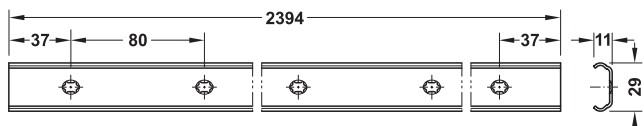

> Version: Pre-drilled (pitch length 80 mm) running track, can be cut or extended to required length, corrosion resistant, dust and dirt repelling


Length mm	Material	Finish	Cat. No.
2394	Steel	Galvanized	421.85.111
3994	Stainless steel	–	421.85.105

Packing: 1 piece

Order reference

Fixing screws not supplied.
Please select and order in accordance with the usage area.
Special lengths and functions available on request.

→ Running gear for linear runner 29 mm

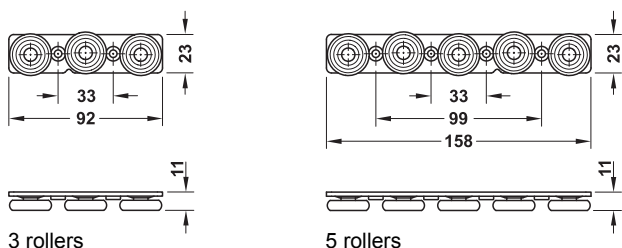


> Bearing: With ball bearings, 3 or 5 rollers
> Thread: M5

Bearing	Cat. No.
3 rollers	421.85.801
5 rollers	421.85.802

Packing: 1 piece

→ Running track for linear runner 37 mm

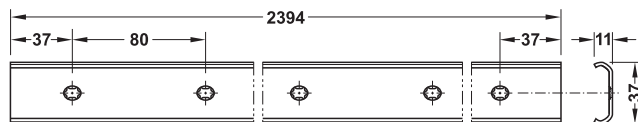

> Version: Pre-drilled (pitch length 80 mm) running track, can be cut or extended to required length, corrosion resistant, dust and dirt repelling


Length mm	Material	Finish	Cat. No.
2394	Steel	Galvanized	421.85.110
3994	Stainless steel	–	421.85.125

Packing: 1 piece

Order reference

Fixing screws not supplied.
Please select and order in accordance with the usage area.
Special lengths and functions available on request.

→ Running gear for linear runner 37 mm

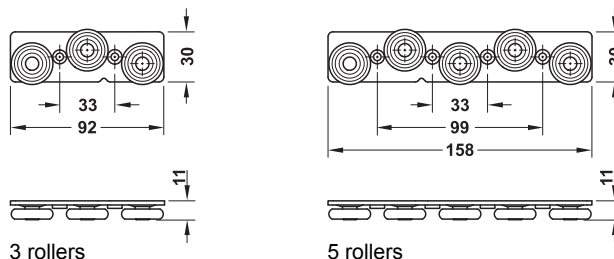

> Bearing: With ball bearings, 3 or 5 rollers
> Thread: M5

Bearing	Cat. No.
3 rollers	421.85.803
5 rollers	421.85.805

Packing: 1 piece