


Concealed mortise hinge, size 111.5 mm

For flush doors





- Area of application: For wooden frames, for flush wooden interior doors
- Opening angle: $\leq 180^\circ$
- Door width: $\leq 1,000$ mm
- Door height: $\leq 2,000$ mm
- Door thickness: ≥ 40 mm
- Size: 111.5 mm
- Adjustment facility: Continuously 3D adjustable: Height ± 1.5 mm, side and closing pressure ± 1 mm

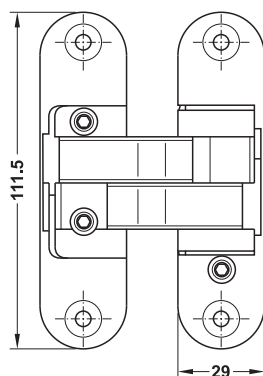


6

Installation



Routing pattern for frame and door


Weight chart

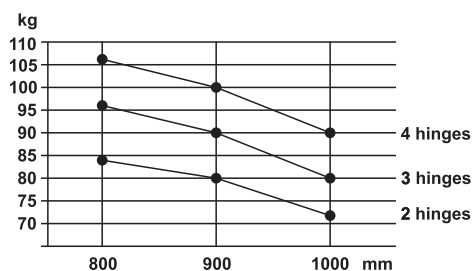

Material	Finish	DIN left	DIN right
Zinc alloy	Nickel plated matt	927.32.006	927.32.016
	Nickel plated polished	927.32.007	927.32.017
	Gold coloured polished	927.32.008	927.32.018

Universal routing jig

For H2/H7 routing template

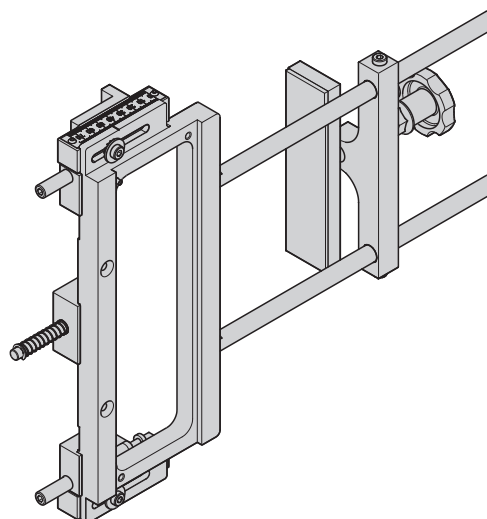


- Area of application: Mounting aid for Startec H2/H7 routing templates

Supplied with

- 1 Universal routing jig
- 1 Clamping device

	Cat. No.
Universal routing jig	927.91.900

H2/H7 Routing template

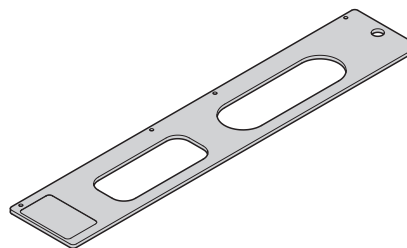

- Area of application: For routing the hinge recesses for Startec H2/H7 concealed mortise hinges

Suitable for	Cat. No.
Startec H2 door hinge	927.91.901
Startec H7 door hinge	927.91.902