

## Sliding door fitting Häfele Slido D-Line11 80P telescopic opening



> Profiles and panels available in black and silver coloured



- > Application: For telescopic opening and closing of 2, 3- or 4-door systems,
- > For door weight: Depending on the number of door leaves, ≤80/70/60 kg
- > For door width: 600–1250 mm
- > For door thickness: 26–47 mm
- > Adjustment facility: Height adjustment: ±3 mm
- > Mounting: Suspension with screwed on support flange

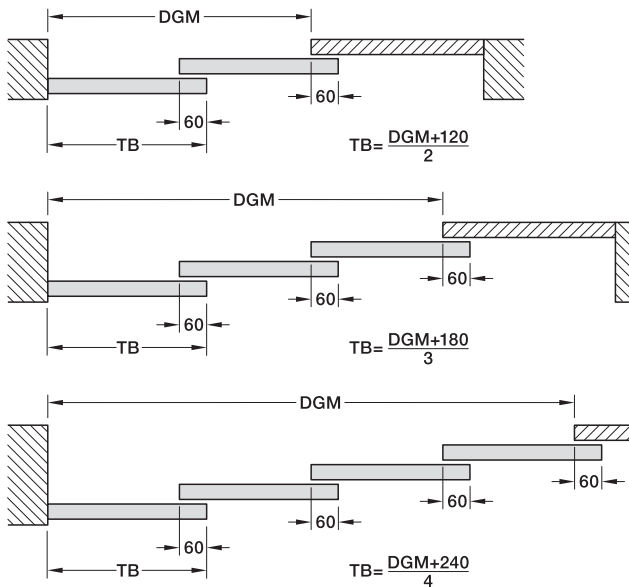
### Note

Please refer to the fitting instructions for further design details.

D	S	A
26–34 mm	S = A - D	41 mm
35–47 mm	6 mm	A = D + S



Sliding fittings for doors

9




DGM = End-to-end length  
TB = Door width


### Parking situation

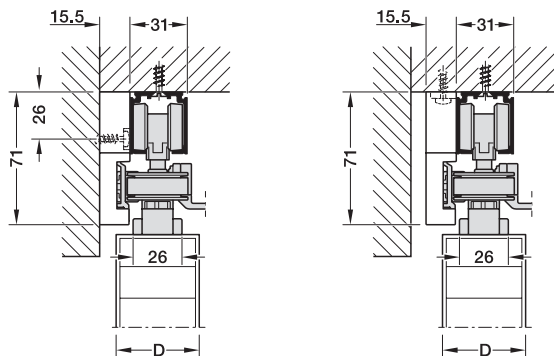

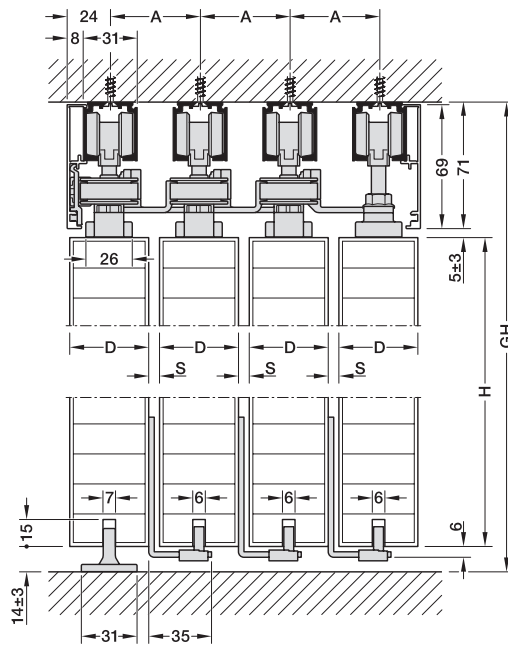The optional mounting block for the toothed belt can be screwed to the soffit or ceiling as an alternative.



$H = GH - 71 - 5 - 14$

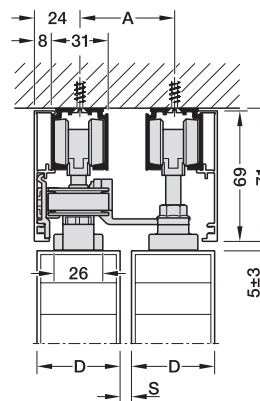



A = Track distance  
S = Gap size  
D = Door thickness

DGH-B 2022, HDE-en, 01/22; Dimensional data not binding. We reserve the right to alter specifications without notice.





## → Set without tracks

Model	Number of door leaves per set	For door weight kg	Supplied with	Cat. No.
80P telescopic opening	2	≤80	4 Running gears with support flange for screw fixing 4 Mounting plates 3 Mounting plates, short 1 Mounting plate, long 2 Deflection rollers 1 Short, 1 medium and 1 long follower 1 Floor guide 1 Floor guide with bracket 1 Mounting block for toothed belt (wall, ceiling, panel) 1 Toothed belt (length 2700 mm) 2 Track buffer with retaining spring	941.03.020
	3	≤70	6 Running gears with support flange for screw fixing 6 Mounting plates 4 Mounting plates, short 2 Mounting plates, long 4 Deflection rollers 2 Short, 1 medium and 1 long follower 1 Floor guide 2 Floor guides with bracket 1 Mounting block for toothed belt (wall, ceiling, panel) 2 Toothed belt (length 2700 mm) 1 Short, 1 medium and 1 long toothed belt follower, 2 Track buffer with retaining spring	941.03.021
	4	≤60	8 Running gears with support flange for screw fixing 8 Mounting plates 5 Mounting plates, short 3 Mounting plates, long 6 Deflection rollers 3 Short, 1 medium and 1 long follower 1 Floor guide 3 Floor guides with bracket 1 Mounting block for toothed belt (wall, ceiling, panel) 3 Toothed belt (length 2700 mm) 2 Short, 1 medium and 1 long toothed belt follower, 2 Track buffer with retaining spring	941.03.022

## → Tracks and panels

		Material	Length mm	Silver coloured, anodized	Black, anodized
Single running track, pre-drilled, 31 x 33 mm (W x H)		Aluminium	2000	940.43.922	940.43.661
			3000	940.43.932	940.43.662
			4000	940.43.942	–
			6000	940.43.962	940.43.663
Clip panel, height 69 mm		Aluminium	2000	941.03.400	941.03.403
			3000	941.03.401	941.03.404
			6000	941.03.402	941.03.405

## → Accessoires

		Material	Colour/finish	Length mm	Cat. No.
Floor guide, plastic		Plastic	Black	60	942.35.400
End cap set for panel, height 69 mm, 47 x 70 mm (W x H), can be shortened		Plastic	Silver coloured	–	941.03.408
			Black	–	941.03.409
Pair of end caps for panel, height 69 mm, 59 x 70 mm (W x H), can be shortened		Plastic	Silver coloured	–	941.03.410
			Black	–	941.03.411
Toothed belt		Plastic	Black	10000	941.03.036

**i** Combination of telescopic and symmetrical opening

► BB 9.25 E