
Rotates through 90° to the left and right

Load bearing capacity 180 kg





A = ring mount B = hole pitch

> Material: Steel Finish: **Bright**

Version: Rotating mechanism: Returned to original position by steel spring,

ring mount: Ball bearing mounted

Ring mount: Friction bearing mounted, with stop and opening Ø 86 mm, e.g. for leading cable through

Installation

Please install additional end stops to relieve springs.

Not suitable for fixed stools/chairs or heavy seats.


Dim. (L x W x H) mm	Cat. No.
175 x 175 x 27	646.15.023

Packing: 1 or 10 pieces

Rotates through 350°

Load bearing capacity 100 kg





B = hole pitch

Installation

> Material:

> Finish:

> Version:

1. Place turntable onto bottom panel and screw fix from above.

Aluminium

Bright

2. Place top panel on top and screw fix from beneath using 16 mm hole.

Diameter mm	Height mm	Cat. No.		
185	28	646.17.009		


Packing: 1 piece


Rotates through 360°

Load bearing capacity 50 kg, with rollers with load bearing capacity 25 kg each









A = ring mount B = hole pitch

1 = roller



Dim. (L x W x H) mm	Diameter mm	Height mm	Packing pieces	Cat. No.
Turntable				
57 x 57 x 10.5	_	10.5	1 or 30	646.12.103
Roller				
-	26	13	1 or 100	646.11.016

GAEB

CAD


7

HAFELE


Rotates through 360°

> Material: Steel
> Version: Ring mount: Ball bearing mounted

Installation

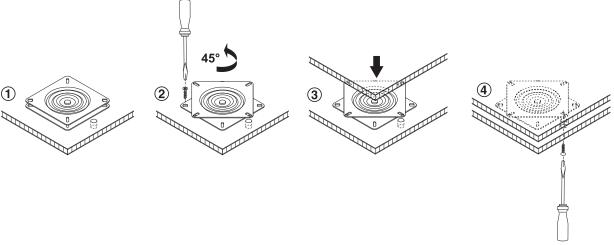


→ Load bearing capacity 150 kg



Dim. (L x W x H) mm	Finish	Cat. No.
155 x 155 x 10.5	Galvanized	646.18.908

Packing: 1 piece



Note

Not suitable for fixed stools/chairs or heavy seats.


Dim. (L x W x H) mm	Finish	Cat. No.
162 x 162 x 20	Bright	646.14.062

Packing: 1 or 10 pieces

ightarrow Load bearing capacity 180 kg



DGH-M-INT 2020, HDE-en, 05/19; Dimensional data not binding. We reserve the right to alter specifications without notice.



Note

Not suitable for fixed stools/chairs or heavy seats.

Dim. (L x W x H) mm	Finish	Cat. No.
175 x 175 x 25	Bright	646.15.014

Packing: 1 or 10 pieces



Rotates through 360°

→ Load bearing capacity 100 kg



															Ļ	↓
		Ī														9
Ø12_																
	292										-					

>	Material:	Plastic
>	Colour:	Black


> Version: Ring mount ball bearing mounted

Diameter mm	Height mm	Cat. No.
292	6	646.19.381

Packing: 1 piece

→ Load bearing capacity 150 kg





> Material: Plastic Black Colour:

> Version: Ring mount ball bearing mounted, with non-slip rubber layers For setting up or screw fixing > Installation:

Installation

- > Remove rubber layers before fitting with screws
- > Use drill holes for screws

Diameter mm	Height mm	Cat. No.
230	13.5	646.19.318

Packing: 1 piece

→ Load bearing capacity 300 kg



Ø328 — — — — — — — — — — — — — — — — — — —						
4						
1						
C=Ø261						
B = hole pitch						

Zinc alloy > Material:

Ring mount ball bearing mounted, with non-slip rubber layers Version: > Installation: For setting up or screw fixing

Installation

- > Remove rubber layers before fitting with screws
- > Use drill holes for screws

Diameter mm	Height mm	Finish/colour	Cat. No.
328	16	Black	646.27.347
		Silver coloured, sandblasted	646.27.947

Packing: 1 piece

C = inner circle