



Hawa Clipo 16 GK IF

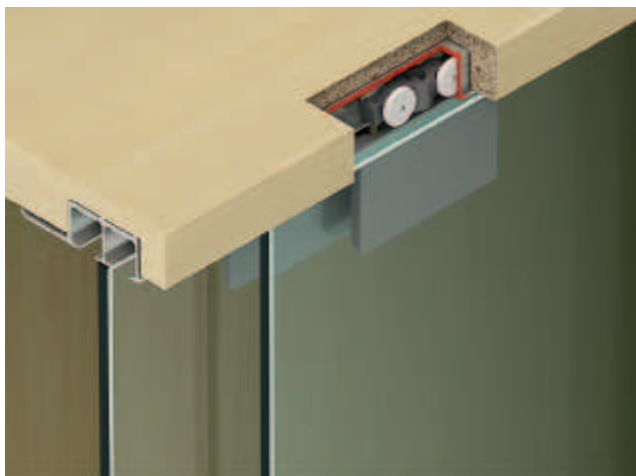

- > Door height: ≤1,400 mm
- > Door width: ≤1,000 mm
- > For glass thickness: 6 mm
- > Door stopper: Top clip-in door stopper, for sliding into single running track
- > Material: Plastic, zinc alloy
- > Running gear: Top running, 4 rollers
- > Running gear guided by: Friction bearing mounted roller: Plastic, axle: Steel
- > Adjustment facility: Height +2/-1 mm
- > Installation: Running gear without tools (quick fixing system), guide for screw fixing, without glass preparation (for glue fixing)

Installation dimensions

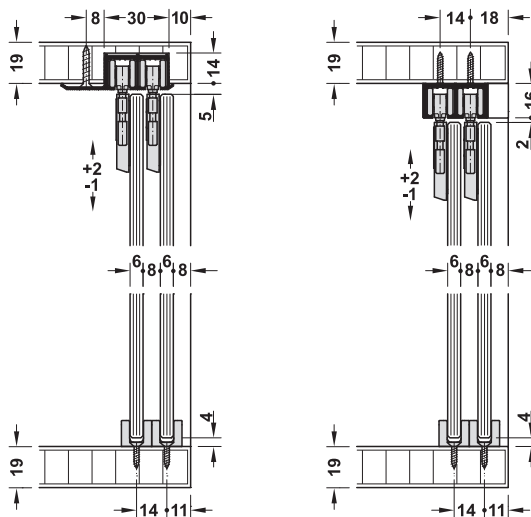


For groove mounting/
screw fixing

For screw fixing


Linear Sliding Doors

10

Door overlap

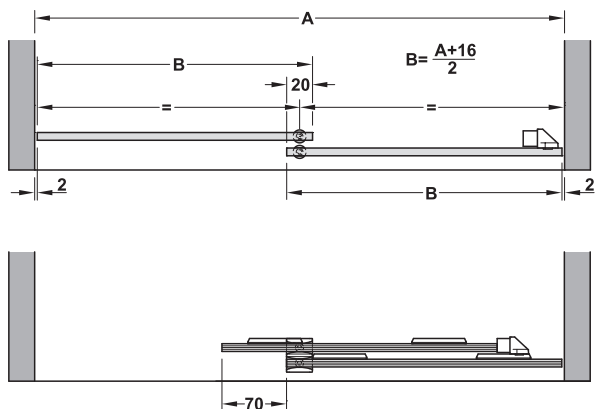

Installation

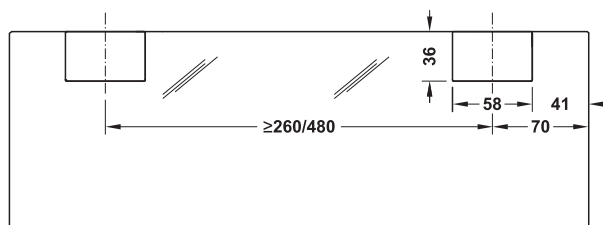

B Door width
A Internal cabinet width

DGH-M 2021, HDE-en, 11/20; Dimensional data not binding. We reserve the right to alter specifications without notice.

→ Set

	Version	Supplied with	Cat. No.
For 2 doors	With clip-in door stopper	4 running gears 2 door stoppers with clip-in door stopper 2 floor guides 1 door follower	405.82.226
	With soft closing mechanism	4 running gears 2 door stoppers with clip-in door stopper 2 floor guides 1 door follower 2 soft and self closing mechanisms with follower	405.82.227

Packing: 1 set

Note




Only use tempered safety glass

Order reference

Please order running and guide tracks separately.

Soft closing mechanism on one side is possible from pitch length of min. 260 mm, both sides from 460 mm. Please order soft closing mechanism set separately.

→ Tracks

		Cabinet top panel thickness	Material	Finish/colour	Length	Packing	Cat. No.
Double top running track, for screw fixing		Min. 19 mm	Aluminium	Silver coloured anodized	2.5 m	1 piece	405.90.962
					3.5 m		405.90.963
					6.0 m		405.90.966
Double top running track, for groove mounting/screw fixing		Min. 19 mm	Aluminium	Bright	2.5 m	1 piece	405.90.972
					3.5 m		405.90.973
					6.0 m		405.90.976
Soft closing mechanism for retrofitting or for soft closing on both sides, with installation instructions		–	Plastic	–	–	1 pair	405.10.075
Penloc GTI adhesive	–	–	Plastic	–	–	1 piece	405.54.010