


Häfele Slido F-Line16 80A

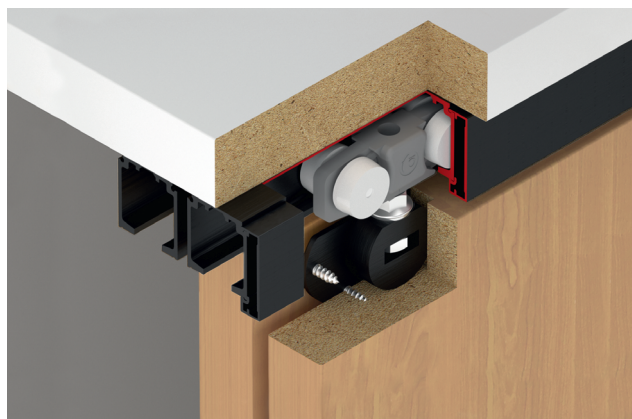

Soft and self closing mechanism:

- > Low opening force – easy and convenient operation
- > Tested with increased closing speed up to 0.4 m/s
- > Can be retrofitted or replaced at any time


Shock absorber:

- > Closing speed with shock absorber tested up to 0.4 m/s



- > Door thickness: 19–33 mm
- > Height adjustment: ±2.5 mm on suspension screw
- > Material: Running gears, housing and guides: Plastic
- > Running gear: Top running, 2 rollers, with axles or ball bearing mounted plastic rollers
- > Installation: Running gear and guide for screw fixing, assembly and removal of the door leaves is possible with fixed or detached panel

Installation dimensions

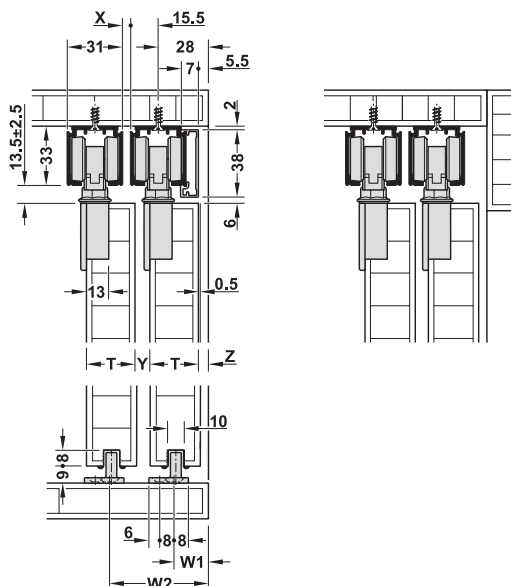

With clip panel (height 38 mm) with door thickness 28 mm With cabinet panel with door thickness 28 mm

The max. door thickness is reduced to 28 mm when using the clip panel. The door bounced back to the clip panel by 8.5 mm with door thickness 19 mm.

T = door thickness
Y = door distance
Z = door return


W1/W2 = distance to first drill hole of front/rear guide

With clip panel


T	X	Y	Z
33	10	8	0
30	7	8	3
28	5	8	5
27	4	8	6
25	2	8	8
24	1	8	9
23	0	8	10
22	0	9	11
20	0	11	13
19	0	12	14

$W1 = Z + (T/2) + 1$
 $W2 = Z + T + Y + (T/2) + 1$


Drilling pattern for running gear



Door overlap




Cabinet with 2 doors




Cabinet with 3 doors

Soft closing versions overview


Without soft and self closing mechanism



With soft and self closing mechanism



With shock absorber



→ Set

Suitable for	Version	Supplied with	Door width mm	Cat. No.
Running gear with axle bearing				
For 2 doors	Without soft and self closing mechanism	4 running gears 4 door stoppers, top 2 bottom guides for door	–	407.40.000
	With soft and self closing mechanism	4 running gears (2 with soft and self closing mechanism and 2 activators) 2 door stoppers, top 2 bottom guides for door	Min. 600	407.40.001
For 3 doors	Without soft and self closing mechanism	6 running gears 4 door stoppers, top 3 bottom guides for door	–	407.40.002
	With soft and self closing mechanism	6 running gears (3 with soft and self closing mechanism and 3 activators) 1 door stopper, top 3 bottom guides for door	Min. 600	407.40.003
Running gear with ball bearing mounted rollers				
For 2 doors	Without soft and self closing mechanism	4 running gears 4 door stoppers, top 2 bottom guides for door	–	407.40.004
	With soft and self closing and opening mechanism	4 running gears with soft and self closing mechanisms and 4 activators 2 bottom guides for door	Min. 650	407.40.005
For 3 doors	Without soft and self closing mechanism	6 running gears 4 door stoppers, top 3 bottom guides for door	–	407.40.006
	With soft and self closing and opening mechanism (rear running doors with soft and self closing mechanism)	6 running gears (4 with soft and self closing mechanism and 4 activators) 3 bottom guides	Min. 650	407.40.007

Packing: 1 set

→ Accessories for retrofitting

		Load bearing capacity kg	Cat. No.
Soft and self closing mechanism, with release device with stopper, for clamping onto running gear		80	407.40.300
Shock absorber with retaining spring, for clamping onto running gear		80	940.83.301

Packing: 1 piece

→ Tracks

		Material	Length m	Silver coloured anodized	Black anodized
Single running track, pre-drilled, for wall mounting and ceiling installation, 31 x 33 mm (W x H)		Aluminium	2.0	940.43.922	940.43.661
			3.0	940.43.932	940.43.662
Single bottom guide track, for press fitting and gluing into groove		Plastic	2.0	–	407.46.302
			3.0	–	407.46.303

Packing: 1 piece

→ Panels

Note		Area of application	Material	Length m	Silver coloured anodized	Black anodized
Clip panel, height 38 mm Door thickness max. 28 mm		For single and double running track	Aluminium	2.0	940.43.711	940.43.712
				3.0	940.43.713	940.43.715

DGH-M 2021, HDE-en, 11/20; Dimensional data not binding. We reserve the right to alter specifications without notice.