




NR-26 w-proof Finger protection



For external doors 



Mounting example

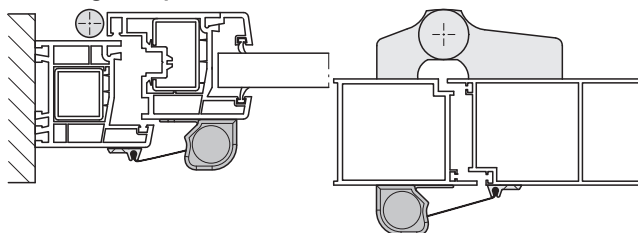

Max. extension length 260 mm


- > Area of application: For gap between door and frame on push side, for external doors exposed to temperatures of -20 to +50 °C, resistant against rain, snow, frost, leaves, dirt and UV light, also suitable for fire resistant and smoke control doors
- > Version: The cover is kept under constant tension by the spring force
- > Material: Profile: Aluminium, cover: Fire retardant synthetic fibre
- > Finish: Profile: Silver coloured anodized, cover: Anthracite
- > Length: 1,925 mm = available length for standard doors, (2,500 mm = max. available length), cannot be shortened
- > Installation: For screw fixing, blind side with concealed screws

	Cat. No.
NR-26 w-proof finger protection	950.15.591


Order reference

Fixed lengths and Eloxal/RAL colours available on request.
NR-26XL version with extension length 320 mm,
2,015 mm for power-operated doors also available on request.

NR-32 w-proof Finger protection

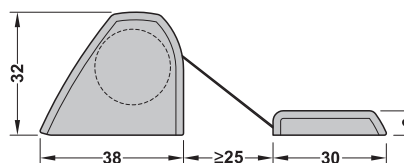

Mounting example

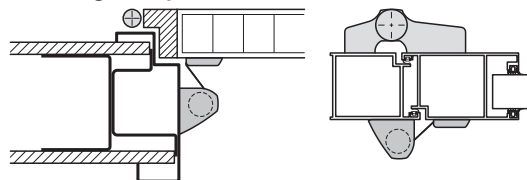

Max. extension length 260 mm

- > Area of application: For door gap between door and frame on push side, for external doors in the temperature range -20 to +50 °C, also for smoke control and fire resistant doors
- > Version: The easy and secure disassembly allows maintenance of the door hinges, prepared for adaptation to panic exit devices
- > Material: Profile: Aluminium, cover: Fire retardant synthetic fibre
- > Finish: Profile: Silver coloured anodized, cover: Anthracite
- > Length: 1,925 mm = available length for standard doors (2,500 mm = max. available length), cannot be shortened
- > Installation: Mounting rail for screw fixing, housing for clip fixing

Supplied with

1 finger protection blind system with mounting rail
1 set of mounting material

	Length mm	Cat. No.
NR-32 w-proof Finger protection	1925	950.15.710
	2000	950.15.711

Order reference

Fixed length and NR-32 XL with max. extension length 320 mm available on request.
Aluminium profiles can be colour-coordinated to match existing door systems on request.

Hinge guard

► BB 8.42

