



Häfele Slido F-Line21 40H

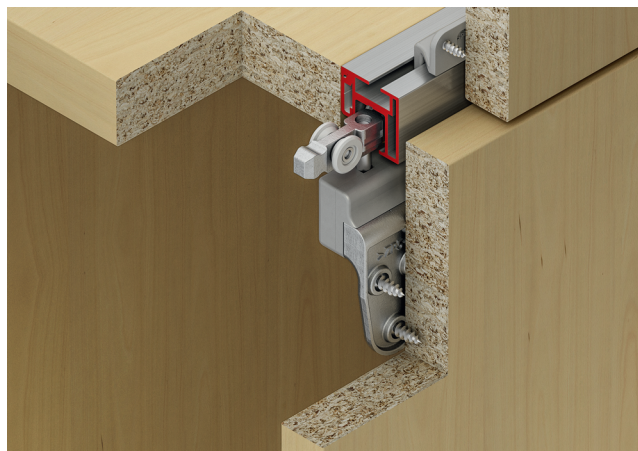


- > Door width:  $\geq 370$  mm with soft closing mechanism on one side,  $\geq 550$  mm with soft closing mechanism on both sides
- > Door thickness: 16–25 mm
- > Door stopper: Top clip-in door stopper or soft and self closing mechanism, for sliding into running track
- > Door weight: Min. 21 kg (recommended)
- > Panel/shelf thickness: 19 or 25 mm
- > Material: Running gear and guide: Plastic, mounting plate: Zinc alloy
- > Running gear: Top running, 4 rollers
- > Running gear guided by: Ball bearing mounted roller: Plastic, axle: Steel
- > Adjustment facility:  $\pm 2$  mm on running gear using adjusting wheel
- > Installation: Mounting plate for screw fixing, running gear without tools (quick fixing system)

Linear Sliding Doors

Drilling pattern

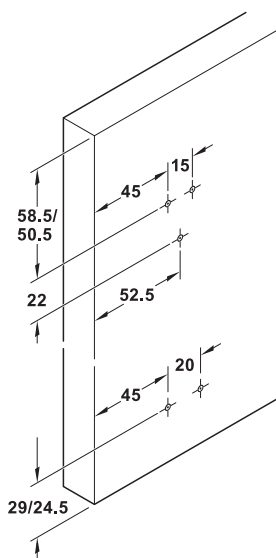


Track installation

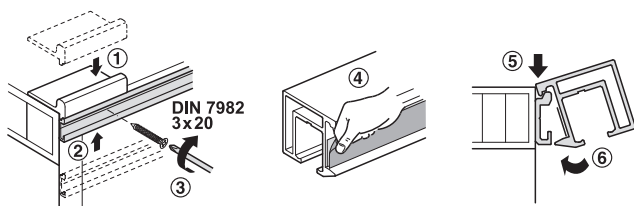

A grub screw is not required for securing the tracks against unhooking. The tracks are clipped in.

Installation dimensions

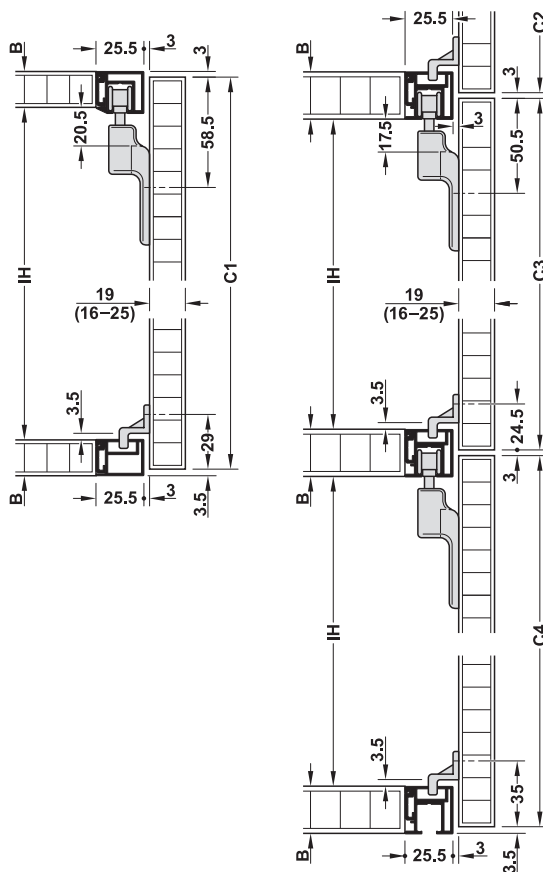

Single shelf

B = shelf thickness  
C = door height  
IH = inner cabinet height

Door height calculation:  
 $C1 = IH + 2B - 6.5$

Shelves positioned above each other

B = shelf thickness  
C = door height  
IH = inner cabinet height

Door height calculation:  
 $C2 = IH + 1.5B - 4.5$   
 $C3 = IH + B - 3$   
 $C4 = IH + 1.5B - 5$

DGH-M 2021, HDE-en, 11/20; Dimensional data not binding. We reserve the right to alter specifications without notice.



## → Set

	Version	Supplied with	Cat. No.
For 1 door	With clip-in door stopper	2 running gears 2 guides 2 door stoppers with clip-in door stopper 4 stoppers (2 for shelf 19 mm, 2 for shelf 25 mm)	402.32.013
	With soft and self closing mechanism on one side, 40 kg	2 running gears (1 with soft and self closing mechanism) 2 guides 2 door stoppers (1 with clip-in door stopper/1 for soft and self closing mechanism) 4 stoppers (2 for shelf 19 mm, 2 for shelf 25 mm)	402.32.014
	With soft and self closing mechanism on both sides, 40 kg	2 running gears with soft and self closing mechanism 2 guides 2 door stoppers for soft and self closing mechanism 4 stoppers (2 for shelf 19 mm, 2 for shelf 25 mm)	402.32.015

Packing: 1 set










### Order reference

Please order running and guide tracks separately.

### Note

The pitch length of the running gears must be min. 245 mm with soft closing mechanism on one side and min. 425 mm with soft closing mechanism on both sides.

## → Tracks and accessories

		Panel/shelf thickness mm	Material	Finish/colour	Version	Length m	Cat. No.
Single top running track, for glue fixing onto mounting rail on cabinet top panel		19	Aluminium	Anodized, silver coloured	–	2.5	402.32.682
						3.5	402.32.683
Single centre running and guide track, for glue fixing onto mounting rail on shelf, for shelves positioned above each other		19	Aluminium	Anodized, silver coloured	–	2.5	402.32.712
						3.5	402.32.713
End caps, left and right, for running and guide track		19	Plastic	Grey	Left	–	402.32.406
					Right	–	402.32.407
Single bottom guide track, for glue fixing onto mounting rail on base panel		19	Aluminium	Anodized, silver coloured	–	2.5	402.32.722
						3.5	402.32.723
End cap, for guide track		19	Plastic	Grey	–	–	402.32.408
Single top running track, for glue fixing onto mounting rail on cabinet top panel		25	Aluminium	Anodized, silver coloured	–	2.5	402.32.732
						3.5	402.32.733
Single centre or bottom running and guide track, for glue fixing onto mounting rail on shelf or base panel, for shelves positioned above each other		25	Aluminium	Anodized, silver coloured	–	2.5	402.32.742
						3.5	402.32.743
End caps, left and right, for running and guide track		25	Plastic	Grey	Left	–	402.32.409
					Right	–	402.32.410
Mounting rail, for fixing running and guide tracks		19 and 25	Aluminium	Bright	–	2.5	402.32.696
						3.5	402.32.697
Adhesive for end caps	–	–	–	–	–	–	003.04.001

Packing: 1 piece

### Order reference

Please order mounting rail for running and guide tracks separately.

Handles for sliding doors

► MB 10.233