

Accuride 1319




- > Door height: ≤700 mm (≤2,300 mm in conjunction with Parallelo synchro control)
- > Door thickness: 16–20 mm
- > Material: Steel
- > Finish: Galvanized
- > Installation: Runners for screw fixing to cabinet top or base or to intermediate panel with mounting brackets

Application and planning dimensions


Wooden strut for connecting top and bottom runner must be manufactured on site: Length = internal cabinet height – 85 mm

Installation with brackets on cabinet top panel and base panel

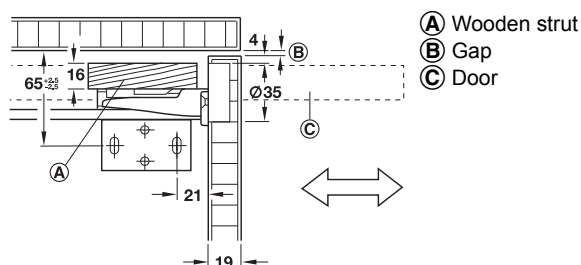

Installation on intermediate panel

In order to adjust the arm of the concealed hinge, either shorten or drill hole in intermediate panel

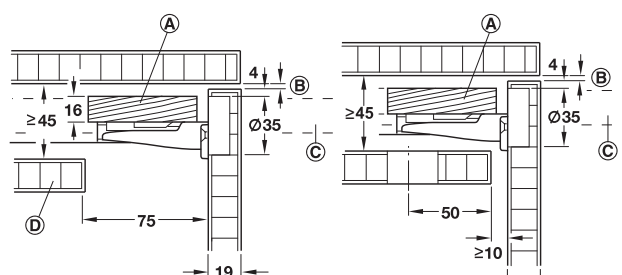


With shortened intermediate panel

With drill hole
Ø 35 mm

Ⓐ Wooden strut Ⓑ Gap Ⓒ Door Ⓓ Intermediate panel

Installation of concealed hinges and cruciform mounting plates

Use concealed hinges with opening angle 95° and door offset max. 8 mm for mounting the door.

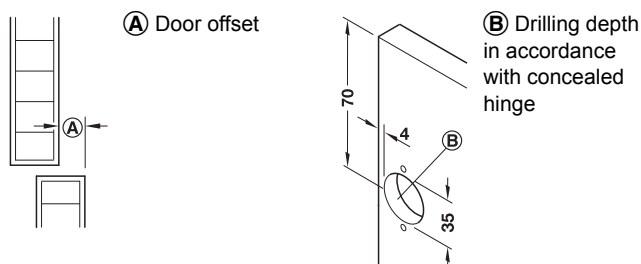

Mount cruciform mounting plate on runner.

When using Blum Clip Top hinges with Inserta cup fixing, the cruciform mounting plate must be mounted on the wooden strut.

- Ⓐ Runner
- Ⓑ Cruciform mounting plate
- Ⓒ Wooden strut
- Ⓓ Mounting bracket
- Ⓕ Concealed hinge

Installation with mounting brackets on cabinet top and base panel

→ Set


	Supplied with	Runner length mm	Dim. B mm	Push-in depth mm	Cat. No.
For 1 door	1 pair of runners 4 mounting brackets	350	186	Max. 244	408.07.350
		400	236	Max. 294	408.07.403
		450	286	Max. 344	408.07.458
		500	336	Max. 394	408.07.501
		550	386	Max. 444	408.07.556
		600	436	Max. 494	408.07.609

Packing: 1 or 10 pairs

Order reference

- > Concealed hinges with opening angle of 95°, cruciform mounting plates and cover caps for covering the cup drillings are not included in the set. Please order separately.
- > To ensure that the door runs parallel, order Accuride 1316 Paralello synchro control.

→ Cover cap

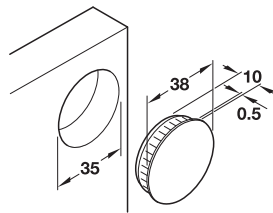

- > Material: Plastic
- > Installation: For press fitting

Colour	Cat. No.
White	340.41.702
Brown	340.41.104

Packing: 1 piece